

KEN IQ10e COMPACT CART WASHER

Intelligent Quality

- The Future of Efficient Disinfection

- ✓ Water recycling
- ✓ User friendly
- ✓ Fast process time

KEN HYGIENE SYSTEMS is introducing a new range of Cart Washers Disinfectors that will ease the daily tasks and workloads for the nursing- and healthcare facilities.

IQ10e COMPACT is a sustainable solution due to its low consumption of water, electricity and detergents.

Among other things the COMPACT has an internal water recirculation system that collects the disinfection water and recycles it.

Furthermore the machine has a short process time, which makes the washing process more time efficient.

Despite of its small physical foot print, the IQ10e COMPACT can still be used for washing and disinfection of larger size equipment in CSSD- and care facilities.

The machine is useful for CSSD's when washing surgical equipment, containers, vessels and utensils due to its flexible load carriers as well as for care facilities for washing wheelchairs, walking aids, toilet chairs, bowls and similar equipment.

The IQ10e COMPACT represents a new generation of cart washer disinfectors with outstanding features that meet the latest regulatory standards such as EN/ISO 15883-1/2/6. This allows the IQ10e COMPACT to work as a backup for the standard washer disinfectors in a CSSD.



CART WASHER




The IQ10e COMPACT is made to be an eco-friendly machine. By monitoring cycle parameters and variables and with dedicated programs the machine will always seek to optimize water, energy and chemical consumption by its built-in control functions.

Advantages:

- Intelligent water savings
- User friendly control system
- Water recirculation
- Increased productivity
- Low energy costs
- Low chemical usage
- Very low water consumption
- Flexible trolleys
- Low noise level
- Remote service

| Technical specification | IQ10e-C |
|---------------------------------|--|
| External dimensions (HxWxD) mm | 2450x1900x1500 |
| Usable chamber space (HxWxD) mm | 1870x970x1300 |
| Preheating tanks capacity | 100 + 100 liters |
| Electrical connection | 400 Vac3N 50 Hz |
| Total electrical consumption | 40 kW electric version 20 kW steam version as standard |
| Water pressure inlet | 200-800 kPa |
| Water 1 connection | Cold water: ¾ " RG, 5-30 °C, 0-30 °C dH |
| Water 2 connection | Hot water: ¾ " RG, 30-70 °C, 0-3 °C dH |
| Water 3 connection | Demi water: ¾ " RG, 5-70 °C, 0-3 °C dH, conductivity 0-200 µS |
| Water recirculation pump | 3.0 kW high pressure pump inverter controlled |
| Water recirculation flowrate | Up to 700 l/min |
| Drying air filtration | Class H14 according DS EN 1822 |
| Drying blower | High pressure pump 4.0 kW |
| Drain | Ø100 mm |
| Noise level | < 63 dB |
| Max relative humidity | 80 % |
| Operative environment | Temperature and humidity: 5°C - 40°C, ≤ 80% RH for temperatures up to 31°C |

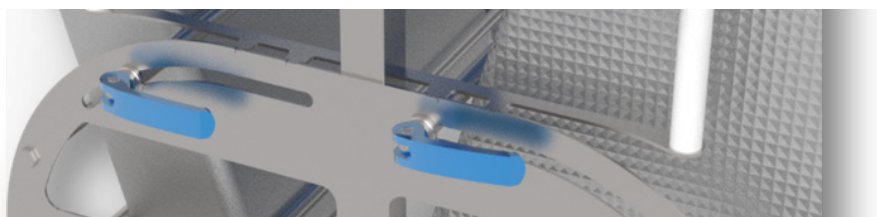

Adjustable handles for the flexible trolleys

Contact a KEN partner

KEN HYGIENE SYSTEMS A/S
 Bøgebjergvej 60 · DK-5672 Broby
 T +45 6263 1091 · F +45 6263 1607
 ken@ken.dk · www.ken.dk

Clean, Lean & Green